

MEANWELL

Model	Output	Case
DRP-240-24 DRP-240-48	24V/10.0A 48V/5.0A	 NEW C-Tick Approved 125.5mm x 65.5mm x 125.2mm – 1.10Kg
S-240-5 S-240-12 S-240-24 S-240-48 DIN240	5V/40.0A 12V/18.0A 24V/10.0A 48V/5.0A Din Rail Bracket	 C-Tick Approved 205mm x 93mm x 65mm – 1.5Kg
SP-300-5 SP-300-12 SP-300-24 SP-300-48 DIN300	5V/50.0A 12V/24.0A 24V/12.5A 48V/6.25A Din Rail Bracket	 C-Tick Approved 230mm x 115mm x 50mm – 1.15Kg
SP-500-12 SP-500-24 SP-500-27 SP-500-48	12V/40.0A 24V/20.0A 27V/18.0A 48V/10.0A	 C-Tick Approved 185mm x 120mm x 93mm – 1.8Kg
PSP-500-5 PSP-500-12 PSP-500-15 PSP-500-24 PSP-500-48	5V/80.0A 12V/41.5A 15V/33.0A 24V/20.8A 48V/10.5A	 C-Tick Approved 279mm x 63.5mm x 127mm
PSP-1000-5 PSP-1000-12 PSP-1000-15 PSP-1000-24 PSP-1000-48	5V/145.0A 12V/75.0A 15V/60.0A 24V/37.6A 48V/19.0A	 C-Tick Approved 278mm x 129mm x 127mm
PSP-1500-5 PSP-1500-12 PSP-1500-15 PSP-1500-24 PSP-1500-48	5V/217.5A 12V/112.5A 15V/90.0A 24V/56.4A 48V/28.5A	 C-Tick Approved 278mm x 129mm x 190.5mm

*Designed & Manufactured by:

TRANSTECH Electronic Controls Pty Ltd

Unit 2/48 Dellamarta Road, Wangara, W.A. 6065 A.C.N. 070 629 499

Tel: (08) 9302 2044 Fax: (08) 9302 2054

Website: www.transtech.com.au

Email: info@transtech.com.au

* "IPS" series only.

Publication TT003/02-03

IPS Industrial Power Supplies

AUSTRALIAN DESIGNED
AND MANUFACTURED



Industrial



Process



Mining

Low Cost Rugged Housing
Linear 1/2 Amp, 1 Amp, 2 Amp, 5Amp
Instrument Loop Compatible
Solenoid Driver Compatible
Switchmode 1.1 Amp to 20 Amp

INDUSTRIAL POWER SUPPLIES – LINEAR




IPS-2x60

The **IPS-2x60** is a low cost regulated, linear power supply. The 120/240V ac input is transferred via a high efficiency transformer, rectified, smoothed and regulated to give two (2) 24Vdc 60mA outputs.

Features:

- Meets new EMI/RFI/Harmonics standards.
- Input Fused (anti-surge).
- Isolation to VDE 0550/BS415 Class 2.
- Plug Off Terminals.
- Solenoid Driver Compatible.
- Over voltage Crowbar.
- Rugged Industrial Housing.
- Can be connected in series or parallel.

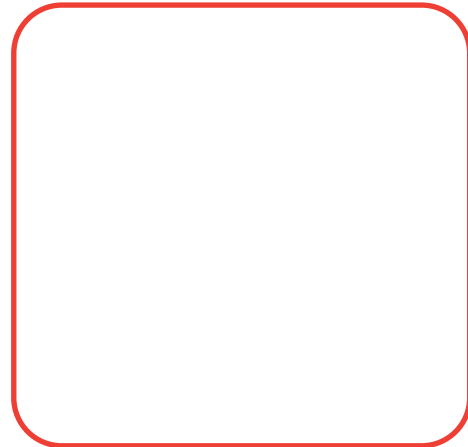


IPS-1A / IPS-0.5A

The **IPS-1A** and **IPS-0.5A** are low cost regulated, linear power supplies. The 120/240V ac input is transferred via a high efficiency transformer, rectified, smoothed and regulated to give a 24Vdc 1amp output (other voltages on request).

Features:

- Very Compact – DIN Rail mounted.
- Plug Off Terminals.
- 4 Positive plus 4 Negative connectors.
- Isolated to VDE 0550/BS 415 Class 2.
- Fused regulated and smoothed output.
- Optional Outputs 5Vdc, 12Vdc, 15Vdc.

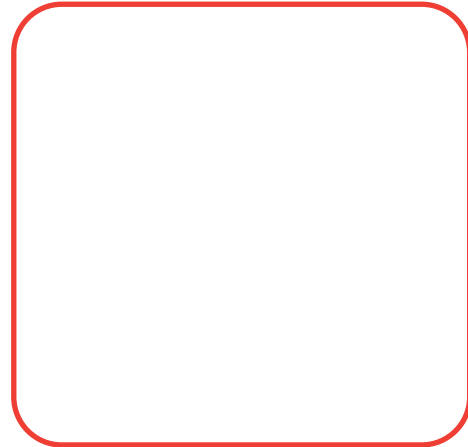


IPS-3A

The **IPS-3A** is a low cost regulated, linear power supply incorporating a high efficiency toroidal transformer. The 120/240V ac input is transformed, rectified, smoothed and regulated to give a 24Vdc 3amp output.

Features:

- Meets new EMI/RFI/Harmonics standards.
- Input Fused (anti-surge).
- Isolation to VDE 0550/BS415 Class 2.
- Plug Off Terminals.
- Solenoid Driver Compatible.
- Over voltage Crowbar.
- Rugged Industrial Housing.

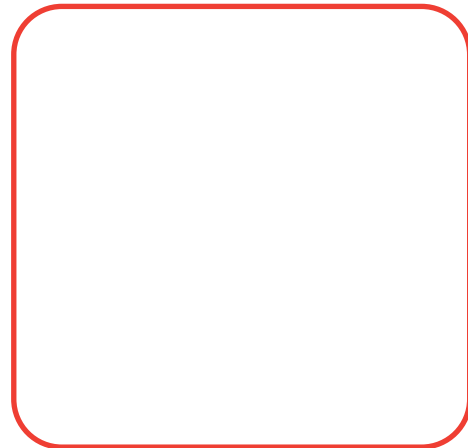


IPS-5A

The **IPS-5A** is a low cost regulated, linear power supply. The 120/240V ac input is transferred via a high efficiency transformer, rectified, smoothed and regulated to give a 24Vdc 5amp output (other voltages on request).

Features:

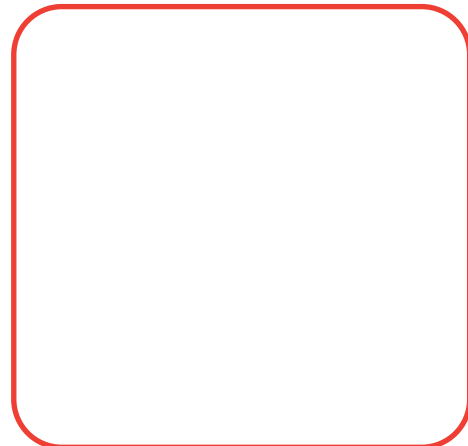







- Meets new EMI/RFI/Harmonics standards.
- Input Fused (anti-surge).
- Isolation to VDE 0550/BS415 Class 2.
- Plug Off Terminals.
- Solenoid Driver Compatible.
- Over voltage Crowbar.
- Rugged Industrial Housing.



INDUSTRIAL POWER SUPPLIES – SWITCHMODE



MEANWELL

Model	Output	Case
S-25-5 S-25-12 S-25-15 S-25-24 DIN25	5V/5.0A 12V/2.1A 15V/1.7A 24V/1.1A Din Rail Bracket	 C-Tick Approved 99mm x 97mm x 35mm – 0.37Kg
S-40-5 S-40-12 S-40-15 S-40-24 DIN40	5V/8.0A 12V/3.5A 15V/2.8A 24V/1.8A Din Rail Bracket	 C-Tick Approved 129mm x 98mm x 38mm – 0.45Kg
DR4505 DR4512 DR4515 DR4524	5V/5.0A 12V/3.5A 15V/2.8A 24V/2.0A	 NEW C-Tick Approved 93mm x 78mm x 67mm – 0.40Kg
S-60-5 S-60-12 S-60-15 S-60-24 DIN60	5V/12.0A 12V/5.0A 15V/4.0A 24V/2.5A Din Rail Bracket	 C-Tick Approved 159mm x 97mm x 38mm – 0.55Kg
DR75-12 DR75-24 DR75-48	12V/6.3A 24V/3.2A 48V/1.6A	 NEW C-Tick Approved 100mm x 65.5mm x 125.2mm – 0.40Kg
S-100F-5 S-100F-12 S-100F-15 S-100F-24 DIN100	5V/20.0A 12V/8.5A 15V/6.7A 24V/4.5A Din Rail Bracket	 C-Tick Approved 199mm x 98mm x 38mm – 0.65Kg
DR120-12 DR120-24 DR120-48	12V/10.0A 24V/5.0A 48V/2.5A	 NEW C-Tick Approved 100mm x 55.5mm x 125.2mm – 0.55Kg
S-150-5 S-150-12 S-150-15 S-150-24 DIN150	5V/30.0A 12V/12.5A 15V/10.0A 24V/6.5A Din Rail Bracket	 C-Tick Approved 199mm x 110mm x 50mm – 0.8Kg