


Digital Input Isolated Safety Barrier

PHD-11TF-27

1 input and 1 output

Input: Switch contacts/proximity switches

Output: Relay

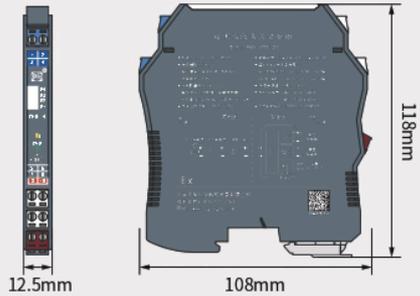

Overview

The isolated safety barrier with switch input relay outputs, which isolates and transmits input signals from switch contacts or proximity switches in hazardous areas to the safety zone with output relay through the safety barrier. Line fault detection is achieved through a separate relay output and displayed on the top LED of the module. The dial switch of the module is used to set input and output in-phase or reverse control, as well as to enable or disable the line fault detection alarm indication function. This product requires independent power supply, with isolated power supply, input, and output terminals.

Specifications

Input in hazardous area:

Input signal: Switch contacts/proximity switches
 The supply voltage of the sensor: About 8V
 Switching rate: <10Hz

Input/output characteristics:

On site input current: >2.1mA, the output is closed, indicating ON
 When <1.2mA, the output is open circuit, indicating OFF
 Output normally "Open"/"Closed" contact conversion control:
 When dial switch K1 is at "ON" side, the relay output is "Normally closed".
 When dial switch K1 is at "OFF" side, the relay output is "Normally open".
 When dial switch K2 is at "ON" side, the circuit selects indicating red light LFD alarm function.

Output in safe area:

Output signal: Relay and alarm relay (optional)
 Contact capacity: 250VAC/2A, 30VDC/2A
 when subjected to resistive loads

Response time: 20ms

Basic parameters:

Supply voltage: 20~35V DC
 Power consumption: <30mA (24V power supply, when the relay contacts close)

LED indicator: Green: Power indicator

Yellow: Output relay in normal working state
 Red: LFD indication, line fault alarm

Temperature parameters: Working temperature: -20°C ~ +60°C,
 Storage temperature: -40°C ~ +80°C

Relative humidity: 10%~95% RH no condensation

Insulation strength: Between intrinsically safe side and non-intrinsically safe side (≥3000VAC/min); between power supply and non-intrinsically safe side (≥1500VAC/min)

Insulation resistance: ≥100MΩ (between input/output/power supply)

EMC: According to IEC 61326-1(GB/T 18268), IEC 61326-3-1


MTBF: 100000h

Wire requirements: Horizontal cutting surface ≥0.5mm²
 Insulation strength ≥500V

Applicable field equipments: Field equipment such as dry contacts or NAMUR type proximity switch inputs that comply with DIN19234 standard

Installation place: Installed in a safe zone, it can be connected to intrinsic safety instruments in hazardous areas up to Zone 0, IIC, Zone 20, and IIIC

Connection wiring

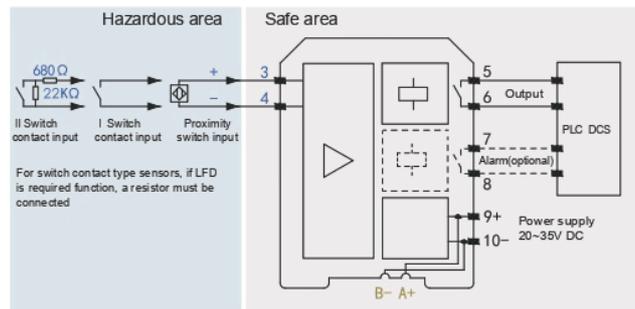

Note: The power supply of the power rail is an optional function. Users need to specify the power supply mode when ordering. Please refer to attachment on page 89.

Line Fault Detection (LFD)

Users can select the "ON" side of the switch at the top of the module to enable fault detection function and indicate an alarm through the red LED light. On site input current >7mA, short circuit alarm (SC); On site input current <0.1mA, open circuit alarm (LB). If the switch contact input requires fault detection function (wire breakage, short circuit), a 22k Ω resistor should be connected in parallel at both ends of the switch, and a 680 Ω resistor should be connected in series (as shown in the wiring diagram for switch contact II).

Intrinsically safe certification

Functional safety certification: SIL3 according to IEC 61508 standards

Explosion proof mark: [Ex ia Ga] IIC [Ex ia Da] IIIC

Explosion-proof standard: GB/T 3836.1-2021 GB/T 3836.4-2021

Terminals 3-4 Um: 250V AC/DC Uo=10.5V DC Io=15mA

Po=39.4mW Co=1.7μF Lo=165mH

Certification body: CQST(China National Quality Supervision and Test Centre for Explosion Protected Electrical Products)

Information maybe revised without prior notice

