


# Vibration sensor input isolated safety barrier

## PHD-11TM-21

1 input 1 output

Input: Vibration sensor signal

Output: 1: 1 signal of vibration sensor

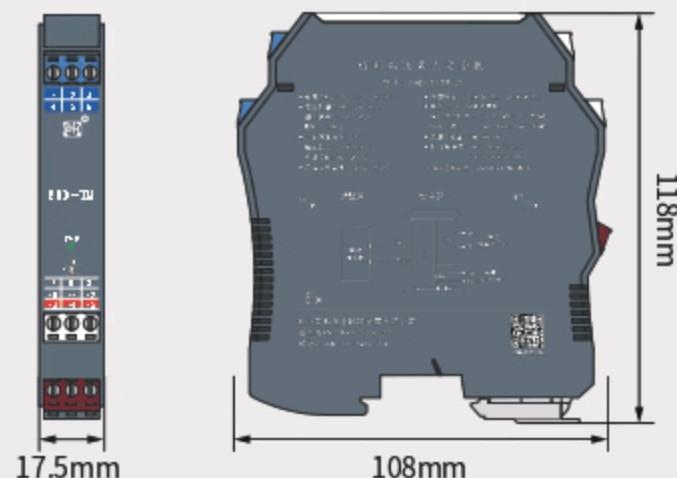

### Overview

The vibration sensor signal is input into the isolated safety barrier, which can realize the 1: 1 isolated transmission of the negative voltage signal output by the vibration sensor in the dangerous area to the safe area, and can transmit AC and DC signals respectively, which has high anti-interference function.

This product needs independent power supply, and the power supply, input and output are isolated.

### Specifications

#### Input in hazardous area:

Input signal:  $-10V \sim +10V$

Impedance:  $100k\Omega$

#### Safety side output:

Output signal:  $-10V \sim +10V$

load resistance:  $R_L \geq 20k\Omega$

#### Basic parameters:

Supply voltage:  $20 \sim 35V$  DC

Power consumption:  $\leq 35mA$  (24VDC power supply)

LED indicator: Green—Power indicator

DC transmission accuracy:  $< 0.2\%F.S$

AC transmission accuracy:  $0Hz \sim 600Hz$ ,  $\pm 0.2\%F.S$   
 $600Hz \sim 10kHz$ ,  $-1.5\% \sim +0.2\%$

Phase response: Less than  $10 \mu S$  is equivalent to

$-0.72^\circ$	200Hz
$-2^\circ$	600Hz
$-3.6^\circ$	1kHz
$-36^\circ$	10kHz

Voltage bandwidth ( $-3dB$ ):  $\geq 40kHz$

Temperature drift:  $0.01\%F.S/^\circ C$

Temperature parameters: Working temperature:  $-20^\circ C \sim +60^\circ C$   
 storage temperature:  $-40^\circ C \sim +80^\circ C$

Relative humidity:  $10\% \sim 95\%$  RH no condensation

Insulation strength: Between intrinsically safe side and non-intrinsically safe side ( $\geq 3000VAC/min$ ); between power supply and non-intrinsically safe side ( $\geq 1500VAC/min$ )

Insulation resistance:  $\geq 100M\Omega$  (between input/output/power supply)

EMC: According to IEC 61326-1(GB/T 18268), IEC 61326-3-1


MTBF: 100000h

Wire requirements: Horizontal cutting surface  $\geq 0.5mm^2$   
 Insulation strength  $\geq 500V$

Applicable field equipments: Vibration sensor, negative voltage generator

Installation place: Installed in a safe zone, it can be connected to intrinsic safety instruments in hazardous areas up to Zone 0, IIC, Zone 20, and IIIC

### Schematic diagram

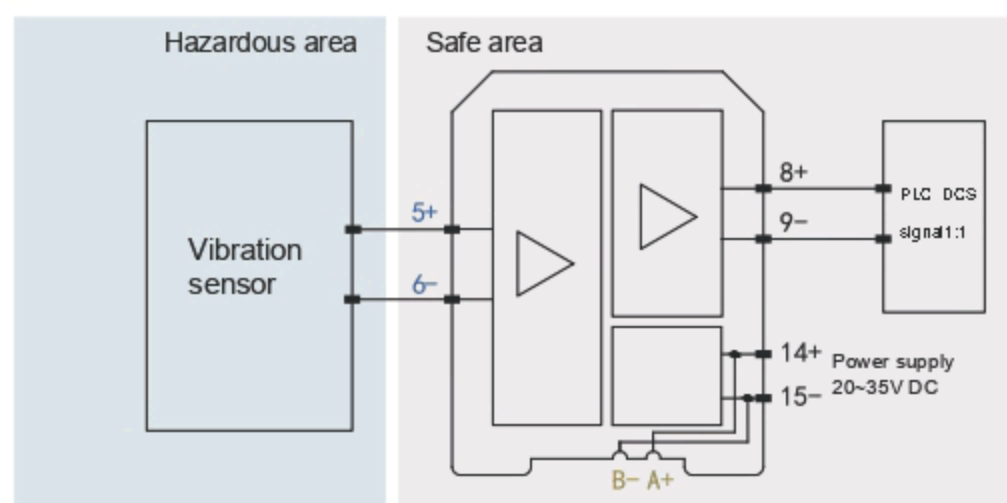

Note: The power rail function is an optional function, and users need to specify the power supply method when placing an order

The selection of power rail connectors can refer to page 89 of the "Annex"

### Intrinsically safe certification

Explosion proof mark: [Ex ia Ga] IIC [Ex ia Da] IIIC

Explosion-proof standard: GB/T 3836.1-2021 GB/T 3836.4-2021

Terminals 5-6  $U_m$ : 250V AC/DC  $U_o$ : 1.2V DC  $I_o$ : 0.2mA

$P_o$ : 0.06mW  $C_o$ : 100 $\mu F$   $L_o$ : 100mH

Certification body: CQST(China National Quality Supervision and Test Centre for Explosion Protected Electrical Products)