


RTD input isolated safety barrier

PHD-11TZ-46

1 input 1 output

Input: Two-wire or three-wire RTD Pt100 signal

Output: RTD 1:1 Pt100 signal

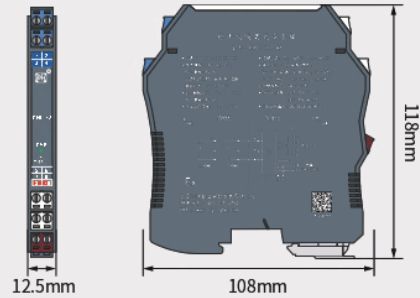

Overview

Thermal resistor input isolated safety barriers can transmit the two-wire or three-wire thermal resistor (RTD)Pt100 signal in the dangerous area to the safe area 1: 1.

This product requires independent power supply, with isolated power supply, input, and output terminals.

Specifications

Input in hazardous area:

Input signal: Two wire or three wire Pt100 signal

Measurement range: -150°C~850°C

Safety side output:

Output signal: RTD Pt100 signal

Excitation current: 0.1~3mA

Basic parameters:

Supply voltage: 20~35V DC

Power consumption: ≤40mA (when 24VDC power supply)

LED indicator: Green: Power indicator

Output accuracy: 0.1% F.S

Temperature drift: 0.1% F.S/10°C

Temperature parameters: Working temperature: -20°C~+60°C
storage temperature: -40°C~+80°C

Relative humidity: 10%~95% RH no condensation

Insulation strength: Between intrinsically safe side and non-intrinsically safe side (≥3000VAC/min); between power supply and non-intrinsically safe side (≥1500VAC/min)

Insulation resistance: ≥100MΩ (between input/output/power supply)

EMC: According to IEC 61326-1(GB/T 18268), IEC 61326-3-1

MTBF: 100000h


Wire requirements: Horizontal cutting surface ≥0.5mm²

Insulation strength ≥500V


Applicable field equipments: Two wire or three wire RTD Pt100

Installation place: Installed in a safe zone, it can be connected to intrinsic safety instruments in hazardous areas up to Zone 0, IIC, Zone 20, and IIIC

Connection wiring

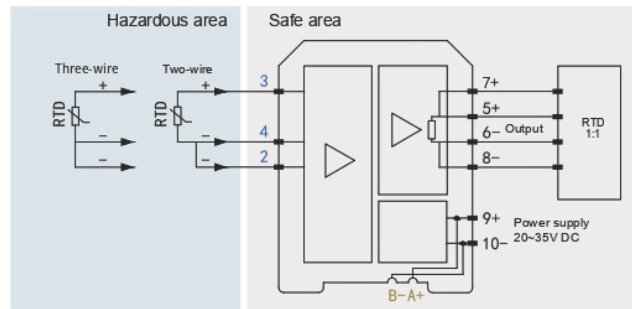

- Note: 1. The power rail function is an optional function, and users need to specify the power supply method when placing an order
The selection of power rail connectors can refer to page 89 of the "Annex"
2. When inputting a three wire RTD, it is necessary to ensure that the three wires are of equal length as much as possible
3. When inputting a two-wire RTD, safety barrier terminals 4 and 2 must be short circuited

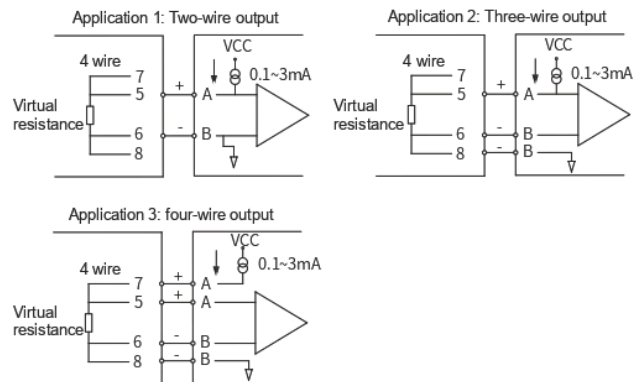

Intrinsically safe certification

Explosion proof mark: [Ex ia Ga] IIC [Ex ia Da] IIIC

Explosion-proof standard: GB/T 3836.1-2021 GB/T 3836.4-2021

Terminals 3-2, 4-2 Um: 250V AC/DC Uo=8.4V DC Io=31mA

Po=65.1mW Co=4.8μF Lo=20mH

Certification body: CQST(China National Quality Supervision and Test Centre for Explosion Protected Electrical Products)

Information maybe revised without prior notice

Beijing Pinghe Chuangye Technology Development Co.,Ltd.
www.beijingph.com

Tel: 010-61252352/61259872/61252312
E-mail: linsen@bjpinghe.com

