

Digital Input Signal Isolators

PHG-12TF-277


1 input and 2 outputs

PHG-22TF-2727

2 input and 2 outputs

Input: Switch contacts/proximity switches

Output: Relay

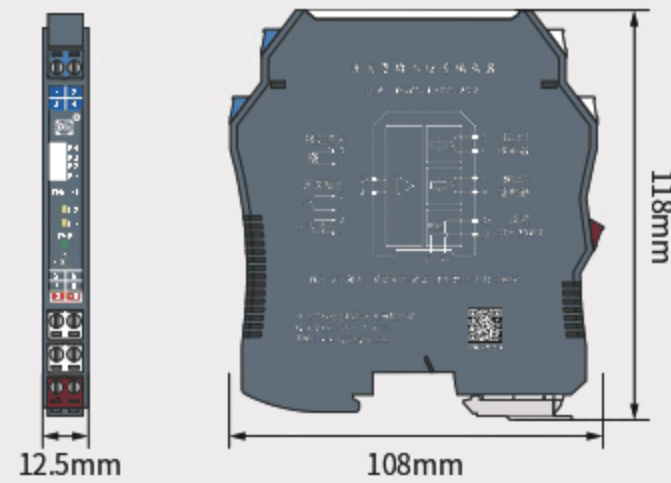

Overview

The switching input relay output signal isolator converts the input signal of the switch contact or proximity switch into a relay output through isolation. Line fault detection is through a separate relay output and displayed by an LED light on the top of the module. The switch of the module is used to select the phase of the channel and whether the line fault detection function is required.

This product needs to be powered independently, and the power supply, input and output terminals are isolated.

Specifications

Input:

Input signal: Switch contacts/proximity switches

The supply voltage of the sensor: About 8V

Switching rate: <10Hz

Input/output characteristics:

On site input current: >2.1mA, the output is closed, indicating ON

When <1.2mA, the output is open circuit, indicating OFF

Output normally "Open"/"Closed" contact conversion control:

When dial switch K1,K3 is at "ON" side, the relay output is "Normally closed".

When dial switch K1,K3 is at "OFF" side, the relay output is "Normally open".

When dial switch K2,K4 is at "ON" side, the circuit selects indicating red light LFD alarm function.

Output:

Output signal: Relay

Contact capacity: 250VAC/2A, 30VDC/2A

when subjected to resistive loads

Response time: 20ms

Basic parameters:

Supply voltage: 20~35V DC

Power consumption: 24V power supply, when the relay contacts close

<1W(PHG-12TF-277)

<1.5(PHG-22TF-2727)

LED indicator: Green: Power indicator

Yellow: Output relay in normal working state

Red: LFD indication, line fault alarm

Temperature parameters: Working temperature: -20°C ~ +60°C,

Storage temperature: -40°C ~ +80°C

Relative humidity: 10%~95% RH no condensation

Insulation strength: ≥2000VAC/min (between input/output/power supply)

Insulation resistance: 100MΩ (500 V DC) (between input/output/power supply)

EMC: GB/T 18268(IEC 61326-3-1)


MTBF: 80000h

Wire requirements: Horizontal cutting surface ≥0.5mm²

Insulation strength ≥500V

Applicable field equipments: Field equipment such as dry contacts or NAMUR type proximity switch inputs that comply with DIN19234 standard

Schematic diagram

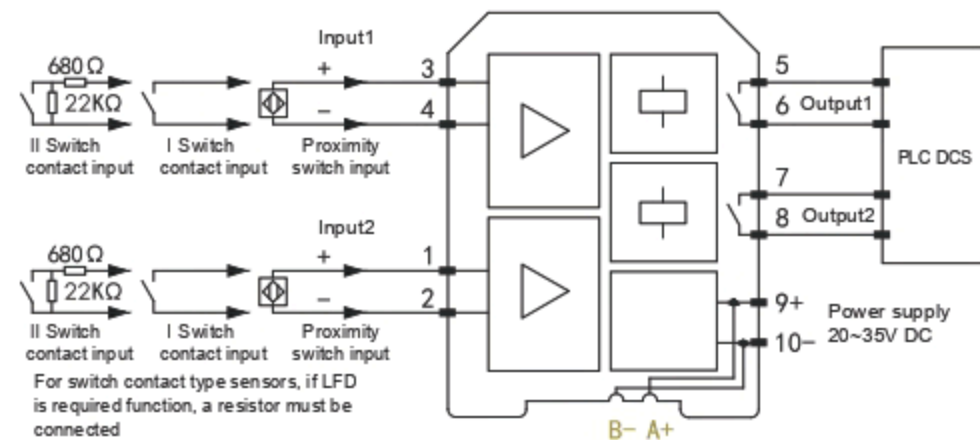

Note: 1. PHG-12TF-277 does not contain input 2 part

2. The power supply of the power rail is an optional function. Users need to specify the power supply mode when ordering. Please refer to attachment on page 89.

Line Fault Detection (LFD)

Users can select the "ON" side of the switch at the top of the module to enable fault detection function and indicate an alarm through the red LED light. On site input current >7mA, short circuit alarm (SC); On site input current <0.1mA, open circuit alarm (LB). If the switch contact input requires fault detection function (wire breakage, short circuit), a 22k Ω resistor should be connected in parallel at both ends of the switch, and a 680 Ω resistor should be connected in series (as shown in the wiring diagram for switch contact II).