



DOMO MAD24 Mosaic tile system

DOMO
SIGNALLING AND CONTROL




Mosaic
Mimic Panels

DOMO - MAD 24 Mosaic tile system


Back structure

Each synoptic part is in polycarbonate having the following properties:

- Operating temperature 130 °C.
- Dimensional stability 147 °C.
- High resistance to crash/impact.
- Flameproof. UL94-V0.

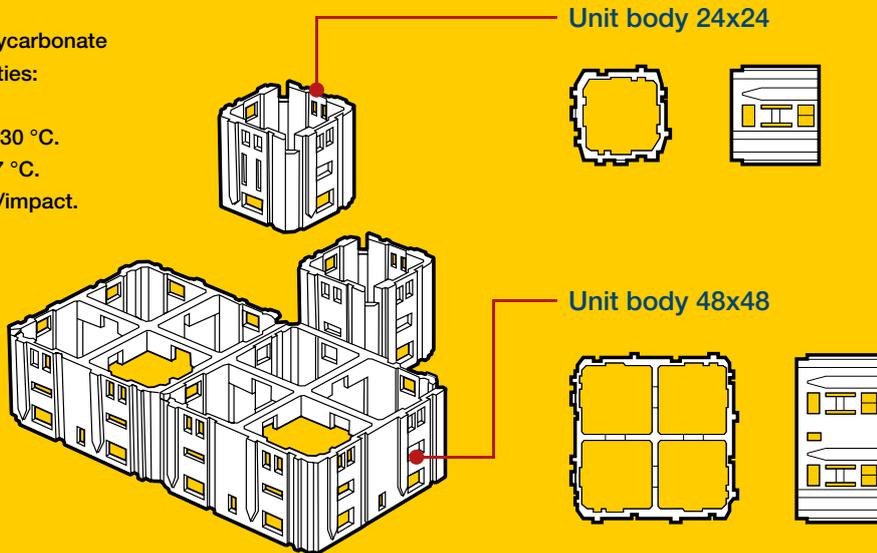


Front tiles

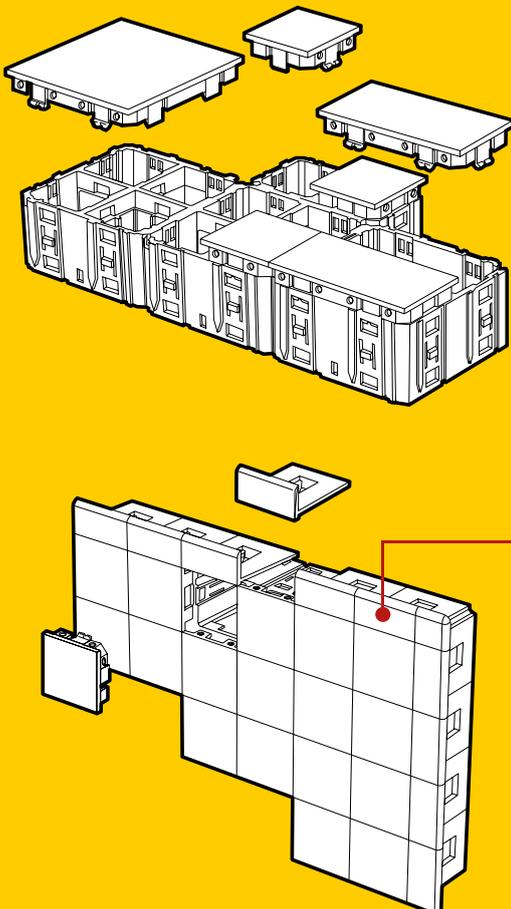

Tile 24x24




Tile 48x48

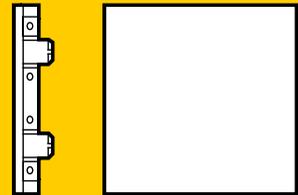


Tile 24x48



Edge tile




Tile 48x48 with partition

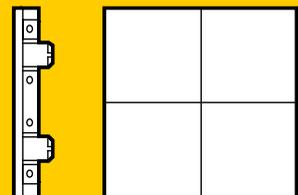


Colors available:

- | | | | |
|---|-----------------------|---|----------------------------|
|  | RAL 7032 - Grey |  | RAL 7016 - Anthracite grey |
|  | RAL 7035 - Light grey |  | RAL 9005 - Black |
|  | RAL 7038 - Grey |  | RAL 1015 - Beige |


■ Electrical panel

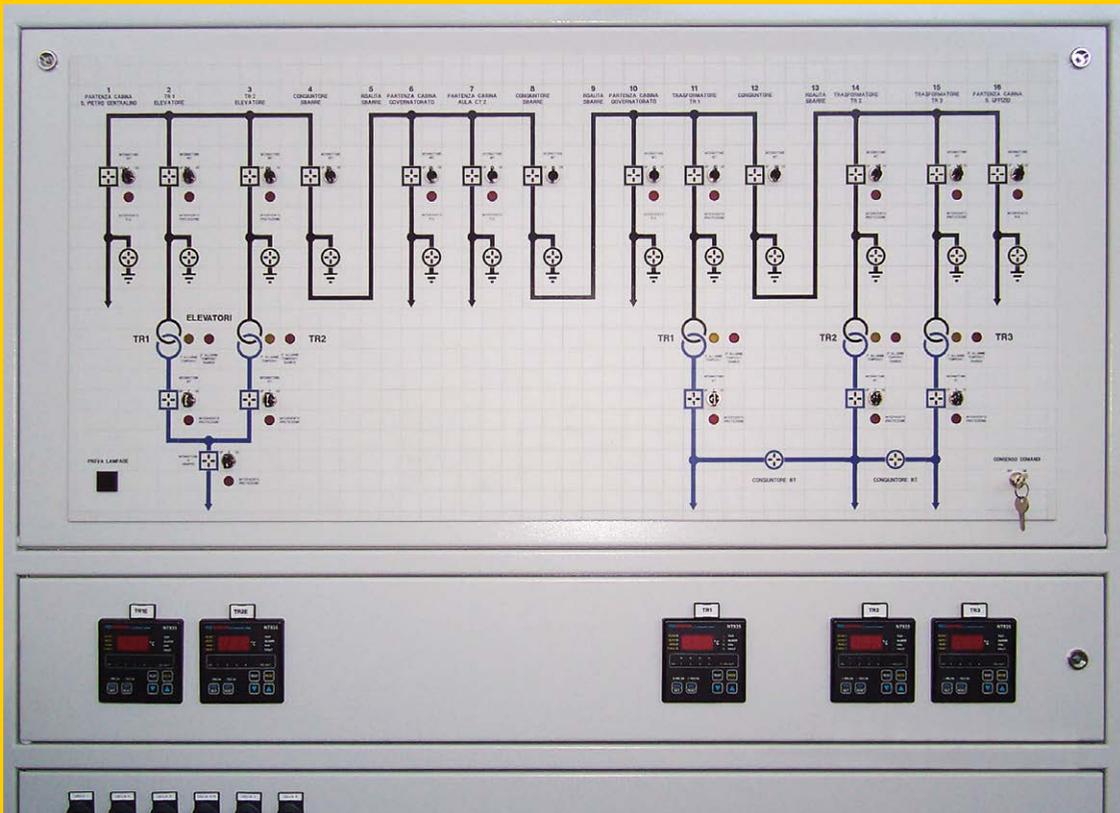




■ Railway system ■ Subway

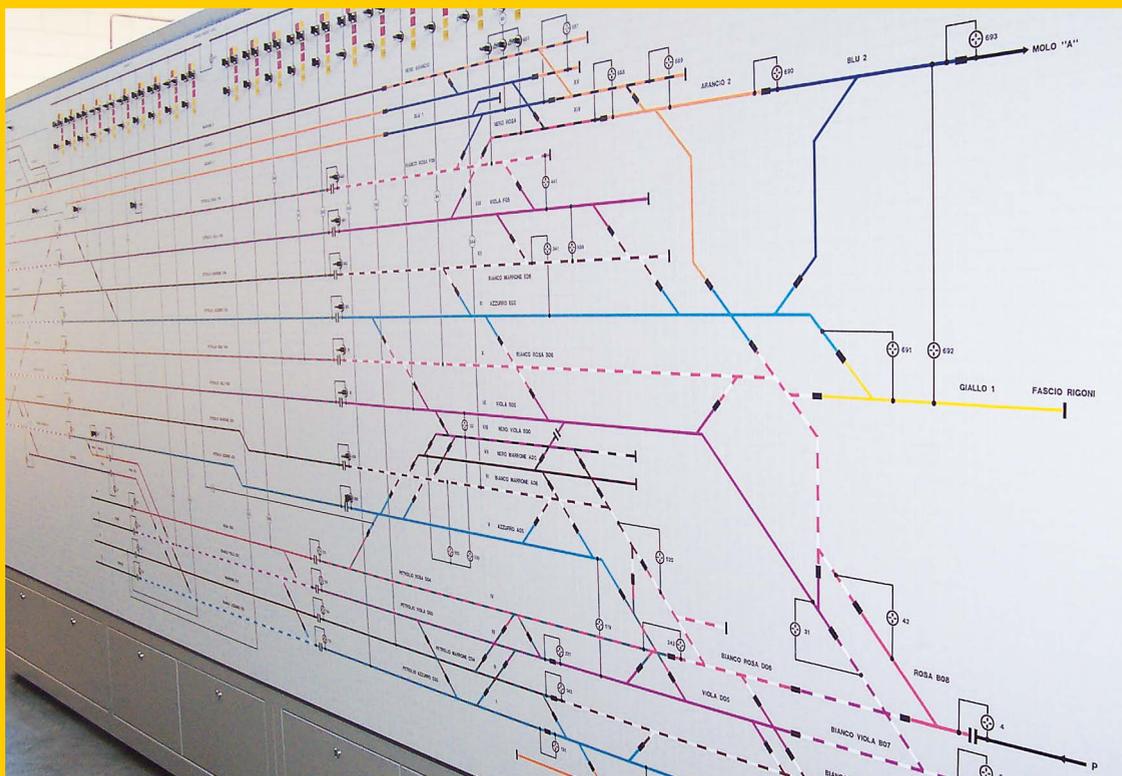

Led, AmpiLed indicator



Pushbuttons

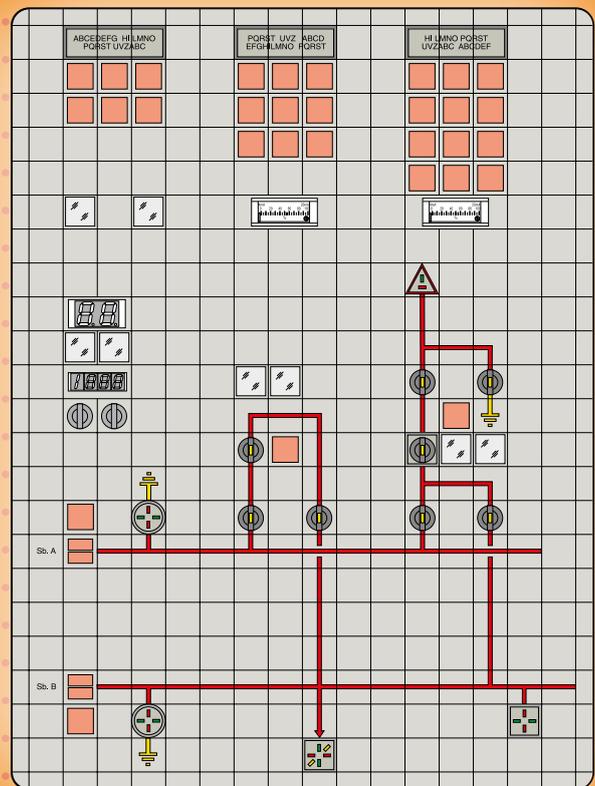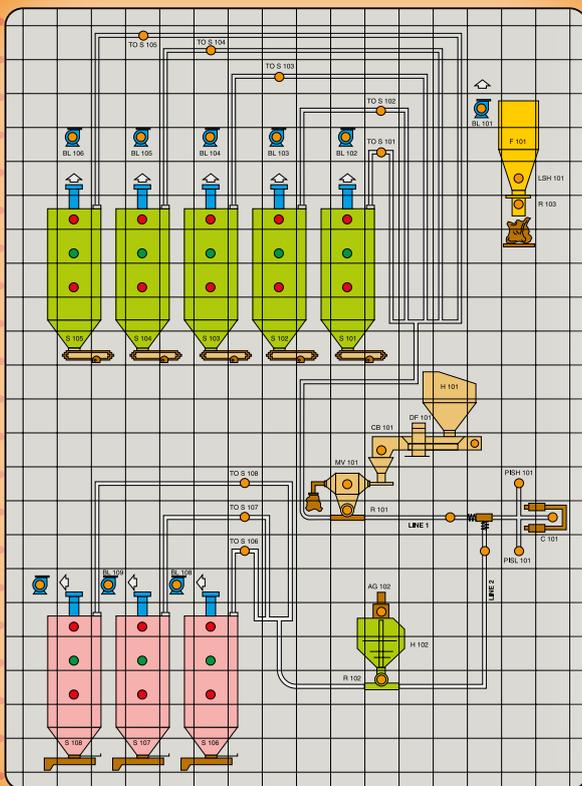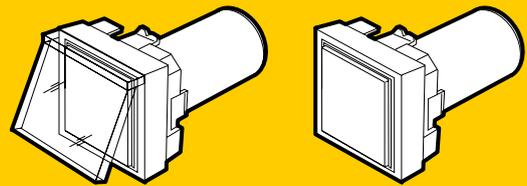


Switch & discrepancy




Position indicator





Space for your instruments

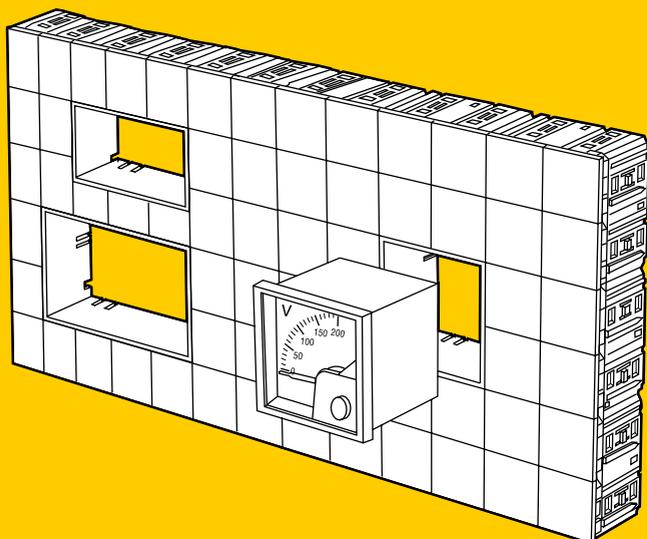

On-desk direct installation

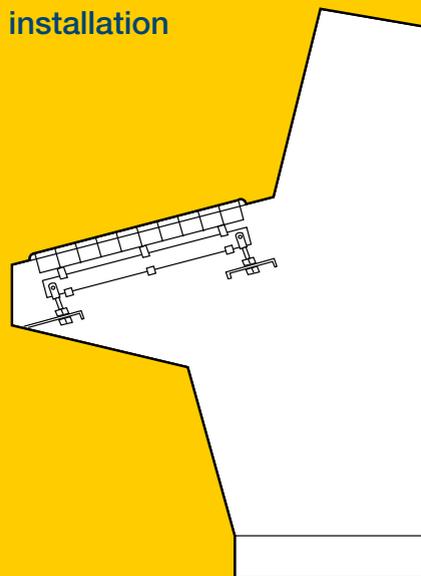


Wiring system

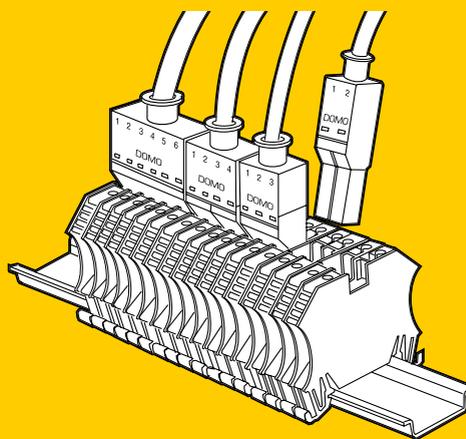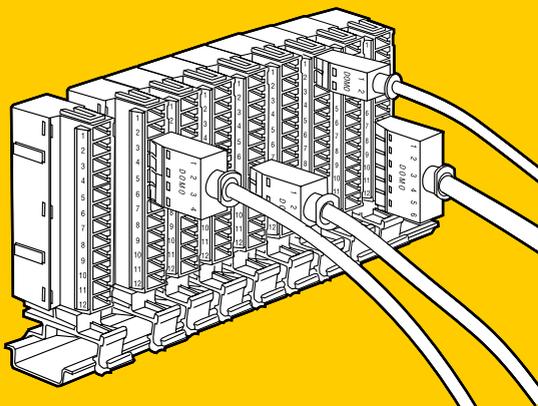

Hard and safety structure thanks aluminium frame bars

- Efficient and immediate sight check of function and processes.
- Rational arrangement of controls and signals.
- Easy updating.
- Extension and resetting while the plant is working.
- Print as your drawing with permanent mark.

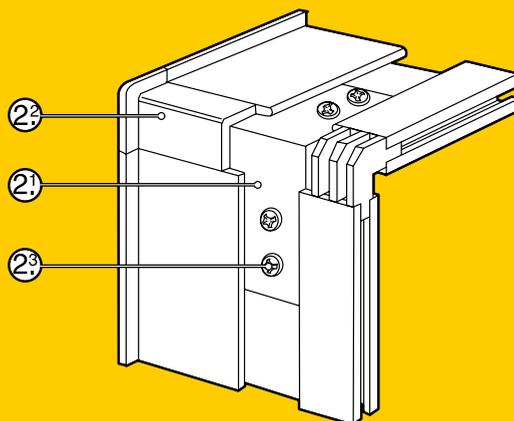



DOMO S.r.l.

Via Leone Tolstoj, 34 - 20098
S. Giuliano Milanese (MI) ITALY

Tel. +39 02 98240540
Fax +39 02 9848601

info@domo.it
www.domo.it



ISO 9001:2008 Report n° 46995 QM



Led
Indicators



Led
Lamps



Pushbuttons



Switches



Control Panels
and Annunciator



Safety
and Light



Mosaic
Mimic Panels