


Clip-In Offset Tag


NS

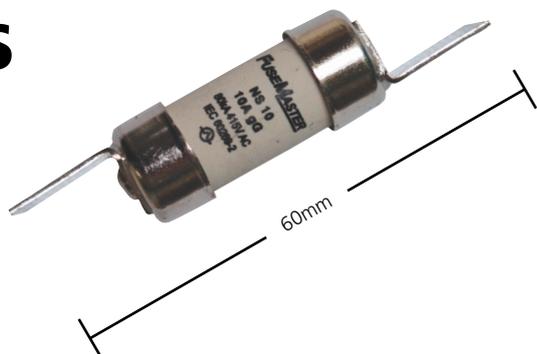

Type gG for cable and line protection
Type gM for motor protection

Standards: BS88: Part 6; IEC 60269-2

FUSECO PART NUMBER	AMP RATING	VOLTAGE RATING	UTILISATION CATEGORY	BREAKING CAPACITY AT RATED VOLTAGE
NS2	2A	415V	gG	80 kA
NS4	4A	415V	gG	80 kA
NS6	6A	415V	gG	80 kA
NS8	8A	415V	gG	80 kA
NS10	10A	415V	gG	80 kA
NS16	16A	415V	gG	80 kA
NS20	20A	415V	gG	80 kA
NS25	25A	415V	gG	80 kA
NS32	32A	415V	gG	80 kA
NS10M16	10M16A	415V	gM	80 kA
NS16M20	16M20A	415V	gM	80 kA
NS20M25	20M25A	415V	gM	80 kA
NS20M32	20M32A	415V	gM	80 kA
NS25M32	25M32A	415V	gM	80 kA
NS32M40	32M40A	415V	gM	80 kA
NS32M50	32M50A	415V	gM	80 kA
NS32M63	32M63A	415V	gM	80 kA

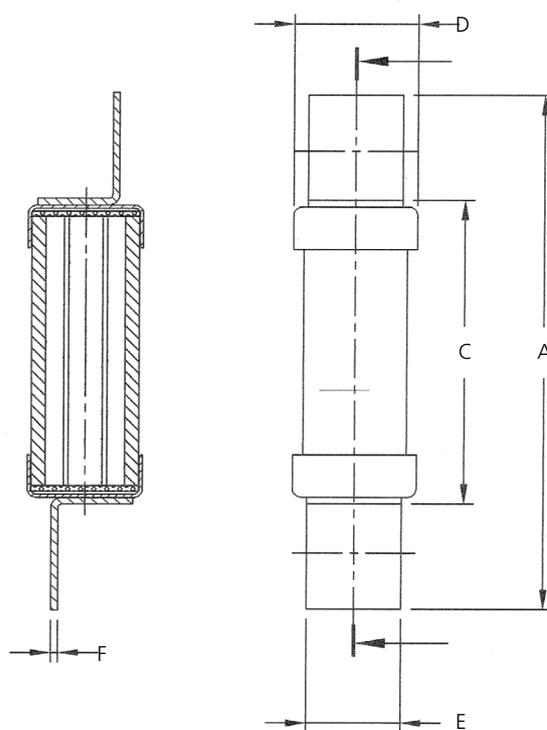

Dimensions

CATEGORY	BRAND	A	B	C	D	E	F	G	H	
		Overall Length	Fixing Centre	Body Length	Body Diameter	Tag Width	Tag Thickness	Hole Length	Hole Width	
NS2-32	F1	FuseMaster	60.0	-	35.0	14.5	11.0	1.0	-	-
NS20M	F1	FuseMaster	62.0	-	35.5	14.5	11.5	1.0	-	-
NS25M	F1	FuseMaster	62.0	-	35.5	14.5	11.5	1.0	-	-
NS32M	F1	FuseMaster	64.0	-	39.0	18.0	11.5	1.0	-	-